


INVERTER

GPHi-11KW#48VPVT

GOOG
POWER

High frequency inverter 11KW

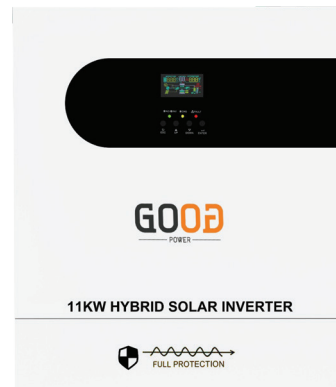

Features

- > Accept extra high PV input current and power.
- > Optional Dual output.
- > Output power factor PF=1
- > lithium battery activation start function with ac and solar mode
- > Parallel function to expansion power
- > Higher solar charging efficiency and battery protection
- > Pure sine wave output, adaptable to different loads
- > 500V high PV input
- > Optional WIFI function
- > Working with or without battery

Technical Specifications

Model		GPHi-11KW#48VPVT
Input	Phase	L+N+PE
	Nominal Voltage	208/220/230/240VAC
	Voltage Range	154-264VAC±3V (Normal Mode) 185-264VAC±3V (UPS Mode)
	Frequency Range	50Hz/60Hz(Adaptive)
Output	Rated Power	11000W
	Output Voltage(AC)	208/220/230/240VAC±5%
	On / Off grid	YES
	Output Frequency	50/60Hz±0.1%
	Dual Output	YES
	Waveform	Pure sine wave
	Transfer Time(Optional)	10ms for computer , 20ms for home appliances
	Peak power	22000VA
	Overload	Battery Mode: 11s@105%~150% Load; 2s@150%~200% Load; 400ms@>200% Load.
	Peak efficiency (battery mode)	>94%
Grid feed	Output Voltage(AC)	220/230/240VAC
	Grid voltage	170-265VAC
	Grid frequency	49-51±1Hz/59-61±1Hz
	Output Current	47.8A
	Power factor	>0.99
Battery	Transfer efficiency(DC/AC)	98%
	Rated voltage	48Vdc
	Constant voltage charging voltage (Optional)	56.4Vdc
charger	Floating charge voltage (Optional)	54Vdc
	PV charging method	MPPT
	PV input current	2 X 27A
	PV max input power	2 X 7500W
	MPPT tracking range	90-500Vdc
	Max PV input voltage	500Vdc
	Max PV charging current	150A
	Max AC charging current	150A
Display	Max charging current	150A
	LCD display	Operating mode/load/input/output, etc.
Communication port	RS232	5PIN/Pitch2.0mm, baud rate 2400
	Expansion & configuration port	2×5PIN/Pitch2.54mm, lithium battery BMS communication card, WIFI card, dry contact card, etc.
	BMS protocol	Pylon tech, Pace, Voltronic, Growatt, Deye, Leoch, Sofar, Goodwe, etc.
Environmental parameters	Parallel interface	YES
	Operating environment temperature	-10~55°C
	Operating environment humidity	20%-95% (Non condensing)
	Storage temperature	-15~60°C
noise	Altitude	The altitude should not exceed 1000m, derating above 1000m, up to 4000m, refer to IEC62040
	noise	≤50db